



# **DATASHEET**

Cooling unit  
with a hybrid  
system

CoolTeg Plus DF

# COOLTEG PLUS DF



CoolTeg Plus DF

➤ **CoolTeg Plus DF** cooling units combine the advantages of CW and XC systems—free-cooling for low and medium outdoor temperatures and direct expansion cooling for use during high outdoor temperatures. The system thus reaches optimal minimum operating costs without the need to compromise.


## MAIN ADVANTAGES

- Free-cooling for the majority of the year—the unit has the most efficient heat exchanger in its category.
- Smart control system uses free-cooling to pre-cool the air even during high outdoor temperatures—energy consumption thus remains minimal.
- Investment in the unit returns within a few years thanks to savings on operating costs (compared to DX or XC systems).
- Since the main heat carrier is water, waste heat can be reused for heating or other purposes to further reduce costs.
- The water circuit and compressor circuit can be connected to two separate water sources—the unit can thus be fully redundant.

## DESCRIPTION


- 2-in-1—small and efficient cooling unit that smartly combines water-based and direct expansion-based cooling.
- Electronically controlled expansion valve—maximum cooling efficiency for any conditions.
- Inverter-driven compressor—minimum energy consumption for all cooling capacities.
- Fans with EC technology enable efficient and smooth control of air flow rate.
- Smart control system ensures the set air parameters are reached precisely and with minimum consumption; immediately informs you of any issues.
- Operating range from -40 to +40 °C (upper temperature limit depends on the size of the outdoor heat exchanger). On request, can be supplied with accessories that allow operating the unit at as low as -55 °C.

CoolTeg Plus DF can save you up to 20 MWh per year compared to a compression cooling unit.

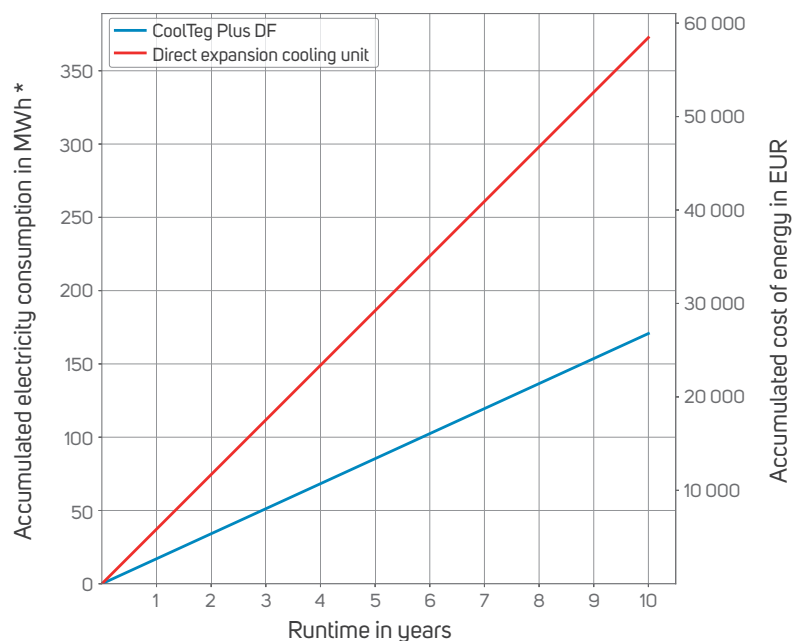

\* The unit's consumption is dependent on its location, or rather, the annual course of temperature at the location. The unit's consumption over the course of the year and use ratio of the individual cooling modes were calculated using nominal values and the annual course of temperature in Prague.

The DF hybrid unit runs in free-cooling mode up to 60 % of the year, in hybrid mode 26 % of the year, and in compression mode **only 14 % of the year**.

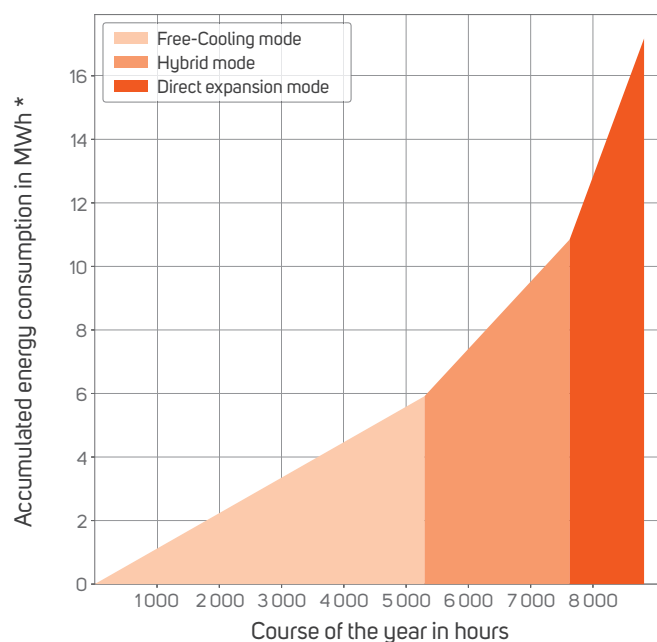

\* The unit's consumption is dependent on its location, or rather, the annual course of temperature at the location. The unit's consumption over the course of the year and use ratio of the individual cooling modes were calculated using nominal values and the annual course of temperature in Prague.

COOLTEG PLUS DF (HYBRID SYSTEM)		
Indoor unit code		AC-TDF-42-40/XX-XXX
Connected outdoor unit		Dry cooler (water cooling using ambient air)
<b>Basic data</b>		
Cooling system	–	Hybrid free-cooling
Architecture <sup>1</sup>	–	Open or closed
Cooling capacity *	kW	24.5 (23.5**)
Refrigerant type	–	R410A
Nominal refrigerant charge	kg	2
Water flow rate *	m <sup>3</sup> /h	3.6 (3.4 **)
Total pressure loss*	kPa	20 (20 **)
Power supply	V/f/Hz	400/3/50-60
Maximum current	A	18
Fan power consumption *	kW	1.1
Compressor power consumption *	kW	6.1
Air flow rate *	m <sup>3</sup> /h	5 600
Number of radial fans	pcs	2
Fan motor technology	–	EC
Filter class <sup>2</sup>	–	G4
<b>Dimensions</b>		
Height	mm (U)	1 978 (42U), 2 111 (45U), 2 245 (48U)
Width	mm	400
Depth <sup>3</sup>	mm	1 000 or 1 200
Weight – depth 1 000 mm, height 42/45/48U	kg	250/258/264
Weight – depth 1 200 mm, height 42/45/48U	kg	262/272/282
<b>Connection dimension</b>		
Supply pipe diameter and type	–	1" female thread
Return pipe diameter and type	–	1" female thread

Air parameters at the output (nominal conditions): 35 °C at 30 % RH. Condensing temperature: 35 °C. Water temperatures: 15/21 °C. Glycol content: 0 %.

\* Values at nominal conditions.

\*\* Compressor circuit (water circuit).

<sup>1</sup> CoolTeg Plus units can be used either independently (in rack rows), or integrated in a Modular Closed Loop (MCL) system—closed loop architecture systems of racks and cooling units.

<sup>2</sup> Units in Modular Closed Loop architecture (MCL) are delivered without filters (standard).

<sup>3</sup> Units in Modular Closed Loop architecture (MCL) are available in 1 200 mm depth only.

# FOLLOW STEPS FOR DETERMINING THE CODE OF THE REQUIRED COOLTEG PLUS UNIT

AC	-	1.	-	2.	-	3.	/	4.	-	5.	-	6.	7.	8.	9.	10.	11.	12.	13.
----	---	----	---	----	---	----	---	----	---	----	---	----	----	----	----	-----	-----	-----	-----

Example of a correct code:																			
AC	-	TDX	-	42	-	30	/	10F	-	BOW	-	0	1	0	2	0	0	0	0

**Description of the example of a correct code:** CoolTeg Plus (facelift) air-conditioning unit with EC fans, suitable for connection to an outdoor condenser unit, open loop architecture, 300 mm width; 1 000 mm depth and 42 U height. 4.3" color touch screen, 1× USB, 2× Ethernet port, proprietary Conteg SW, installed in the front door. Bottom connection. Condensate pump installed in the air-conditioning unit. pCO WEB card for SNMP communication. Prepared for a Mitsubishi Electric outdoor condensing unit. Standard warranty: 2 years.

1. CoolTeg COOLING SYSTEM		2. HEIGHT		3. WIDTH		4. DEPTH *		5.1. PIPE CONNECTION	
Code	Model	Code	Options	Code	Width (mm)	Code	Depth (mm)	Code	Options
TCW	Chilled water	42	42U	30	300	10F	1 000	B	Bottom connection
TDS	Direct expansion (small)	45	45U	40	400	12F	1 200	T	Top connection
TDX	Direct expansion	48	48U	60	600				
TXC	With internal compressor								
TDF	Hybrid system								

5.2. ARCHITECTURE		5.3. DISPLAY		6. HUMIDIFIER		7. CONDENSATE PUMP		8. POWER SUPPLY	
Code	Options	Code	Options	Code	Options	Code	Options	Code	Options
O	Open	W	Not present	0	Not present	0	Not present	0	Standard 230V/1f/50Hz
C	MCL—modular closed loop	D	With screen	1	Humidifier (standard)	2	Leak detection sensor rope	A	Dual power supply
				2	Humidifier (low water conductivity)	3	Condensate pump (powerful) *		
						A	Leak detection sensor rope + condensate pump (standard)		
						B	Leak detection sensor rope + condensate pump (powerful)		

9. COMMUNICATION		10. REGULATION		11. CONTROL VALVES		12. FANS		13. SPECIAL MODIFICATIONS	
Code	Options	Code	Options	Code	Options	Code	Options	Code	Options
O	Not present	0	Standard	0	Standard (3-way valve)	0	Standard	0	Standard
M	Modbus	P	Control based on pressure	2	2-way valve	S	Extra powerful fans (only for CW30)	R	External relay—unit status
W	SNMP	H	Communication with HMI (Mitsubishi Heavy Industry) units					6	6-row heat exchanger
		R	Control based on pressure + communication with HMI (Mitsubishi Heavy Industry) units						
		E	Control based on pressure in combination with CoolTop units						

\* F indicates a unit after a facelift. Units before a facelift have a 0 instead of an F.

\* Used in combination with a humidifier, or if displacement height is over 5 m. Max. height—30 m.

FOR COOLTEG PLUS UNITS

# BASIC ACCESSORIES

## TOUCH SCREEN

- For more user-friendly communication with the unit's regulator, you can use a 4.3" color touch screen.
- A single touch screen can control up to 16 cooling units. For quick communication and full functionality of BMS, we recommend using a maximum of 8 units.
- RS485 port and Ethernet port enable remote control and monitoring using various master systems. The USB is used primarily for quick and easy software updating and downloading of historical data.
- The touch terminal has a number of functions: connection to a customer network, remote control, ModBus communication and many more.
- The screen can be placed directly onto a CoolTop unit, on the side of a rack or onto a wall in the data room.



## CONTROL BASED ON PRESSURE

- Each unit can control air flow rate (fan speed) based on differences in temperature between the hot and cool zones or based on pressure differences.
- Flow rate control based on pressure differences ensures that air is supplied to the area in front of the server at the exact same rate as that at which the servers draw the air in.
- Perfect environment for servers (no risk of server damage caused by over- or under-pressure).
- Minimises power consumption of the entire cooling system due to precise distribution of cooled air.



## CONDENSATE PUMP

- All CONTEG units can be connected to the sewerage system via gravity feed.
- If there is no sewerage connection in the room, the water can be conducted away using a condensate pump.
- Each unit includes a water detector that activates the pump, and a level sensor that turns off the unit in case of increased water levels.



## DUAL POWER SUPPLY

- Electrical PDU for two power branches. The device allows powering the unit from two independent sources.

## STEAM HUMIDIFIER

- The steam humidifier maintains the set relative humidity of the air in the data center.
- The humidifier can output 3 kg of steam per hour
- The steam humidifier of the CoolTeg Plus unit is powered separately.
- You can choose from 2 boiling vessels depending on water hardness.



## pCO WEB COMMUNICATION CARD

- Accessory compatible with CoolTop regulators.
- Enables additional individual communication (monitoring and control).
- Communication via Ethernet network protocols.
- Functions: web server, e-mail, FTP, SNMP, BAC-Net, ModBus TCP/IP and more.



**CONTEG, spol. s r.o.**

Stetkova 1638/18

140 00 Prague 4

Czech Republic

Tel.: +420 565 300 358

[conteg@conteg.com](mailto:conteg@conteg.com)

[www.conteg.com](http://www.conteg.com)

**CONTEG**